

s



# Products

**Display and Touch Integrated System ICs > Embedded DisplayPort™ (eDP) Timing Controllers (Tcons)**

DP627 – 4 Lane DP Tcon

***NOT RECOMMENDED FOR NEW DESIGNS***


Direct Drive LCD Timing Controller  
with 4-Lane DisplayPort™ Receiver

The DP627 is a panel timing controller (Tcon) developed specifically for a PC Direct Drive Monitor (DDM). It includes a DisplayPort™ receiver and supports display resolutions up to 1920 x 1200 (Full HD) with up to 30 bit color. It is designed to be mounted on the LCD panel, eliminating the separate monitor controller board within the monitor to reduce monitor size and cost.

The DP627 provides pixel data through a mini-LVDS interface with programmable timing to support a variety of LCD panel designs. The device includes audio support through both I2S and S/PDIF digital outputs. The DP627 de-spreads the DisplayPort SSC Link clock, and can also add SSC on the mini-LVDS output.

A scaler function is included to provide a full screen display for lower resolution video that may occur during Safe Mode or other DOS modes. Full screen display is supported for input modes such as 640×480, 800×600, and 1024×768.

For the support of display resolution above 1920×1200, please refer to the DP628.

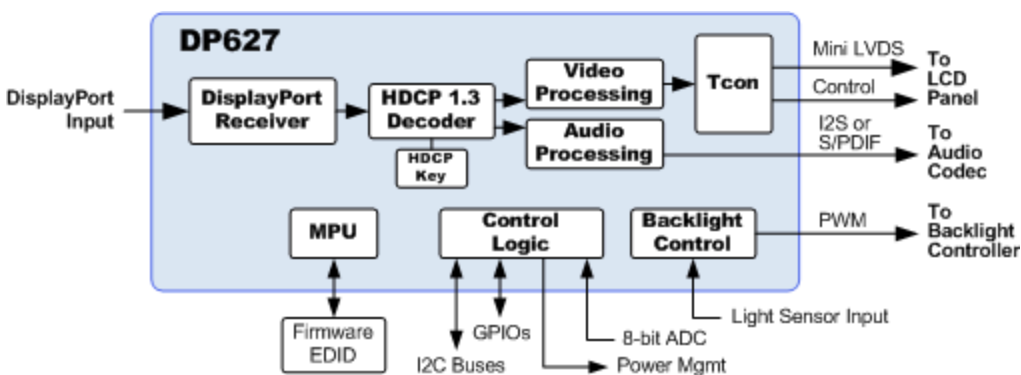

## Features

- Compliant with the VESA® Direct Drive Monitor (DDM) Standard, Version 1.0
- Includes 4-lane DisplayPort™ 1.1a receiver
- Compliant to VESA DisplayPort Standard version 1.1a for both 1.62 and 2.7 Gbps link rates
- CrystalFree™—no external crystal or clock needed
- Adaptive equalizer -supports long DP cable
- Low power consumption
- Integrated TCON with Fully Programmable Timing
- Supports LCD panels up to 1920 x 1200
- Scaler provides full screen display in safe mode
- Supports input with 6/8/10/12-bit color depth
- mini-LVDS Output Format (up to 10 bit)

Gamma LUT plus True Color FRC/Dither Engine  
Integrated MPU and backlight control  
Supports 120 Hz panel at reduced resolution  
Supports Audio stream in DP with I2S/SPDIF Outputs  
Supports On-Screen-Display bar and MCCC  
EMI filtering on mini-LVDS interface  
Supports AUX Channel based power management  
ESD protection 8kV HBM at connector pins  
128-pin 14x20mm LQFP package

## Applications

PC Direct Drive Monitor (DDM)

Contact Us



Copyright © 2022 Parade Technologies, Ltd. - All Rights Reserved. Website by Computer  
Courage.