


- ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.
- ALL CAPACITANCE VALUES ARE IN MICROFARADS.
- ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

REV	ZONE	ECN	DESCRIPTION OF CHANGE	CK APPD	ENG APPD
				DATE	DATE
?		?	?	?	?

SCHEM, BIL INDICATOR BOARD

K20 PROTO2, 8/26/2008

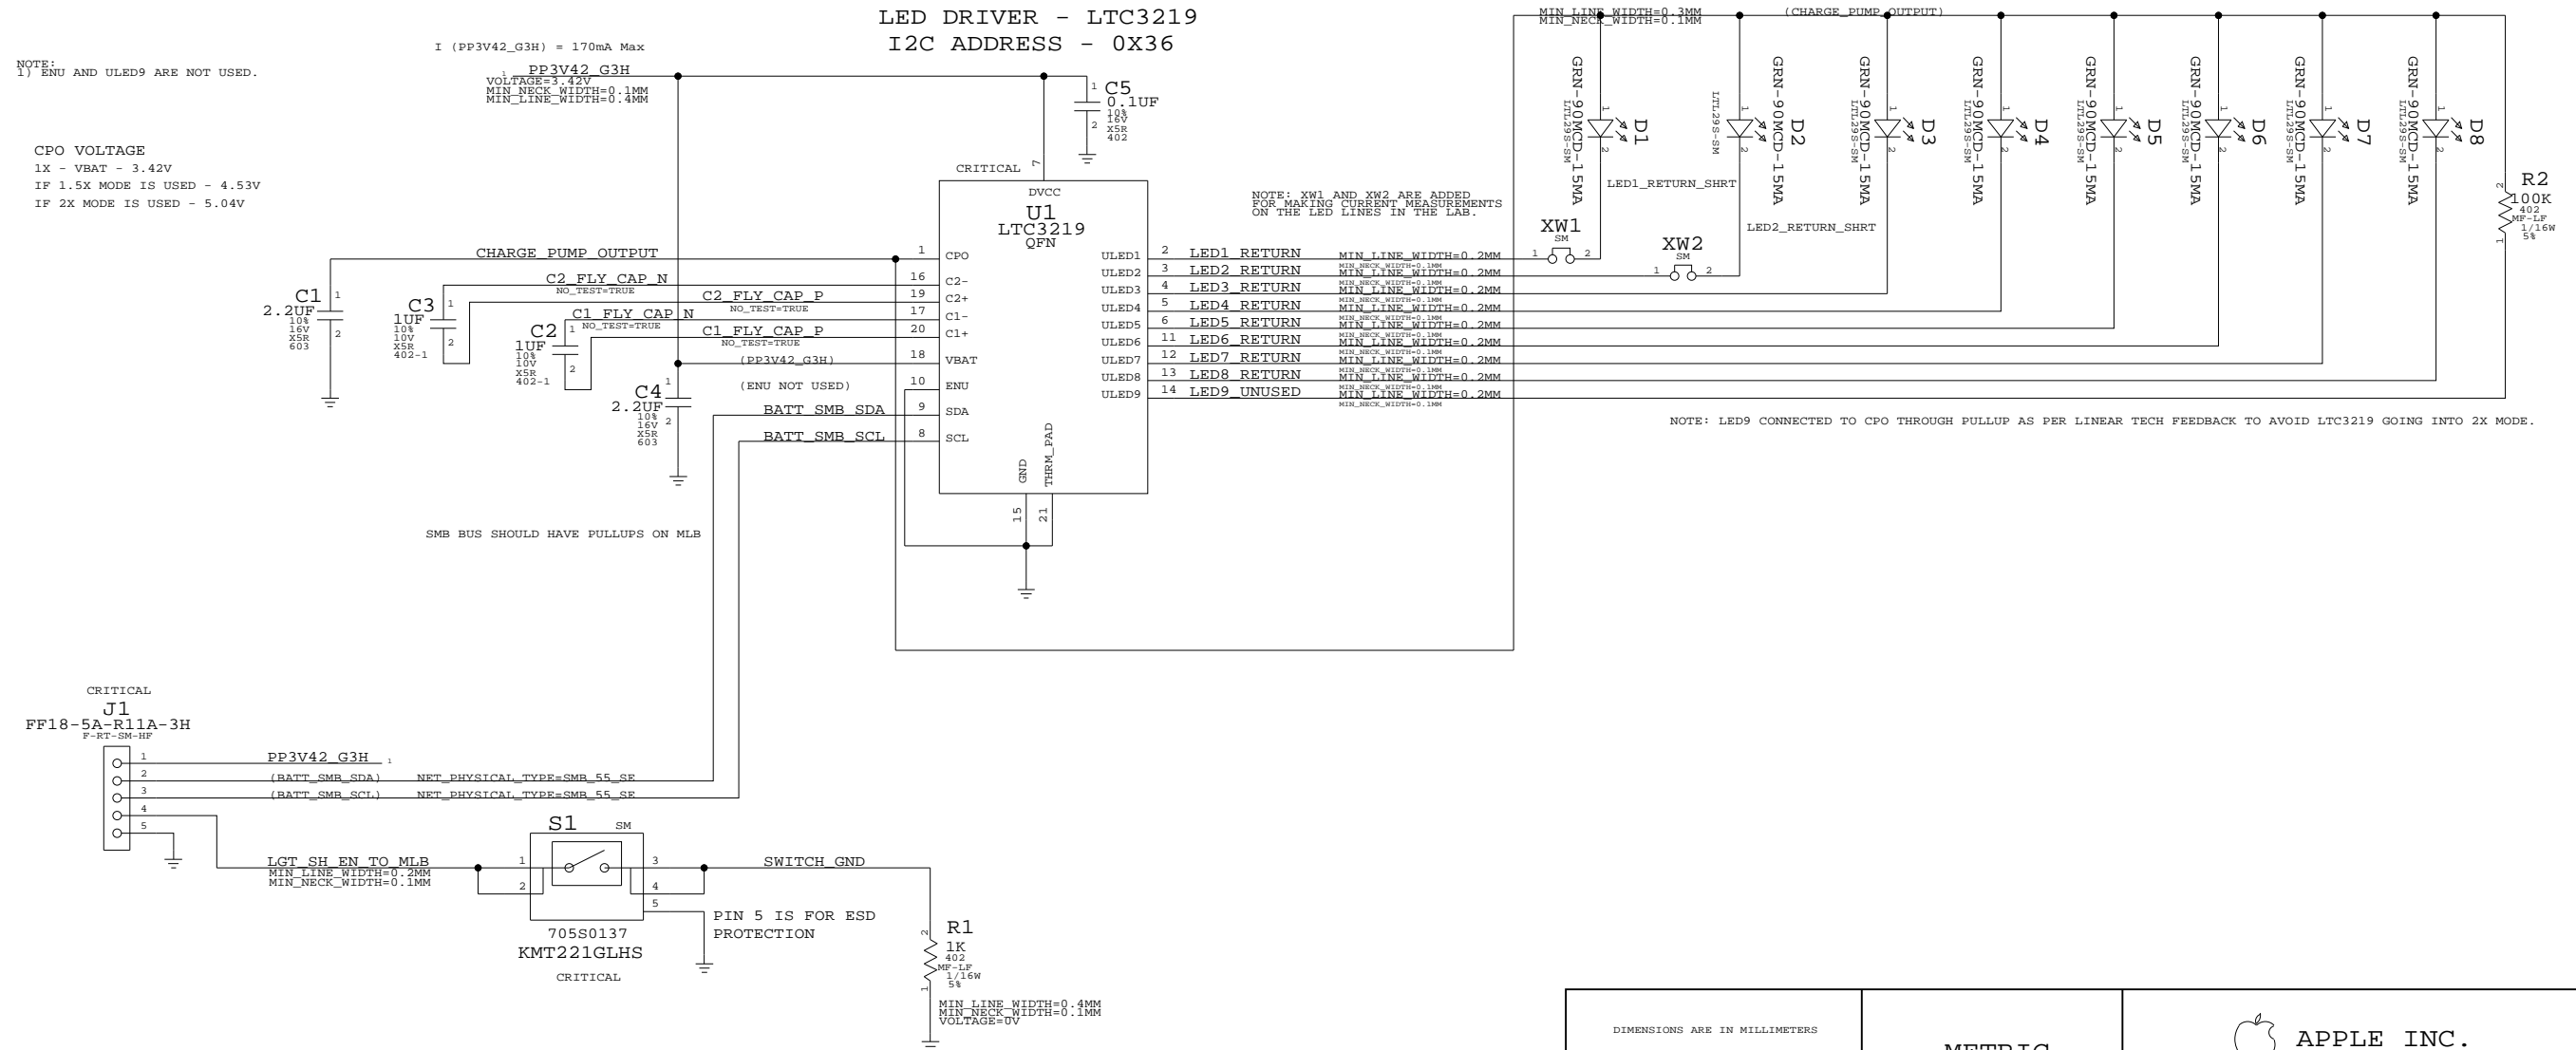

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	CRITICAL	BOM OPTION
051-7812	1	SCHEM,BIL_IND_BRD,K20	SCH1	CRITICAL	
820-2478	1	PCBF,BIL_IND_BRD,K20	PCB1	CRITICAL	

DIMENSIONS ARE IN MILLIMETERS		METRIC		APPLE INC.	
XX :	_____	DRAPTR	DESIGN CK	NOTICE OF PROPRIETARY PROPERTY THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: I TO MAINTAIN THE DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART	
X.XX :	_____	ENG APPD	MFG APPD		
X.XXX :	_____	QA APPD	DESIGNER		
ANGLES :	_____	RELEASE	SUMA		
DO NOT SCALE DRAWING		SCALE	NONE	TITLE	
 THIRD ANGLE PROJECTION		MATERIAL/FINISH NOTED AS APPLICABLE	SIZE D	DRAWING NUMBER	
				SCHEM, BIL_IND_BRD, K20	
				DRAWING NUMBER 051-7812 REV. 1.0.0 SHT 1 OF 1	